

# VSX™ 7000e

Advanced video conferencing for medium and large rooms, with more flexibility than ever before

- Ideal for medium to large rooms of up to 40 people
- Incredibly natural imaging using the latest in video technology and standards
- Easily share presentations, movie files, audio clips and pictures
- Fits seamlessly with any meeting room, flat panel displays, plasmas and LCD's

## Features and Benefits

- Ideal for rooms needing the camera and video system separated
- Smooth, natural motion and sharp, clear images for optimal viewing
- Excellent audio and call clarity with Siren™ 14 audio and StereoSurround™
- Integrate the SoundStation VTX 1000® conference phone for dialing and microphone functionality

## Solutions


The VSX 7000e Series is the provides advanced video conferencing for a variety of applications and organizations worldwide.



•



•

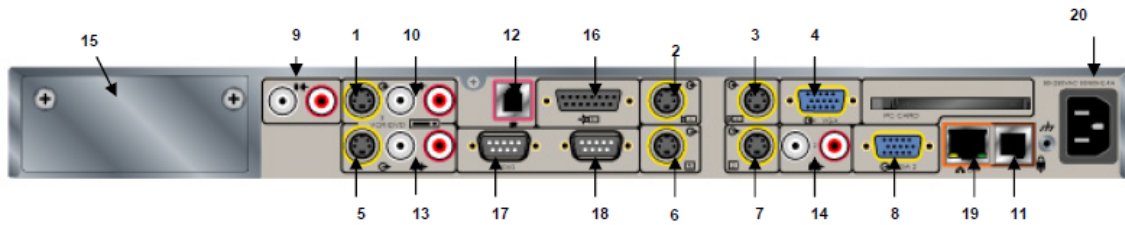

- |  |  |  |
|--|--|--|
| 1. Video input 1 for VCR/DVD or 3 <sup>rd</sup> video source (people or content) | 7. Video output 3 for 2 <sup>nd</sup> monitor                          | 14. Audio output 2 for stereo line level |
| 2. Video input 2 for main camera (people)  | 8. Video output 4 for VGA/XGA main or 2 <sup>nd</sup> monitor          | 15. H.320 network interface bay          |
| 3. Video input 3 for 2 <sup>nd</sup> video source (people or content)            | 9. Audio input 1 for stereo line level                                 | 16. IR Control, power for main camera    |
| 4. Video input 4 for VGA-SXGA (content sharing) - optional                       | 10. Audio input 2 for stereo VCR/DVD                                   | 17. RS-232 #1                            |
| 5. Video output 1 for VCR/DVD record   | 11. Audio input 3 for C-Link, support up to 3 devices for stereo audio | 18. RS-232 #2                            |
| 6. Video output 2 for main monitor   | 12. Audio input 4 for POTS   | 19. LAN NIC, 10/100 auto sensing         |
|  | 13. Audio output 1 for stereo VCR/DVD                                  | 20. EIA electrical input                 |