

VSX™ 7000s

Versatile video conferencing for medium to large rooms and meeting spaces

- Ideal for medium to large rooms of up to 40 people
- An all-in-one solution including embedded PTZ camera
- Incredibly natural imaging using the latest in video technology and standards
- Embedded speaker and subwoofer for superior audio performance
- Easily share presentations, movie files, audio clips and pictures

Features and Benefits



- Easily sits on top of any TV or XGA display
- Smooth, natural motion and sharp, clear images for optimal viewing
- Excellent audio and call clarity with Siren™ 14 audio and StereoSurround™
- Integrate the SoundStation VTX 1000® conference phone for dialing and microphone functionality



•



•

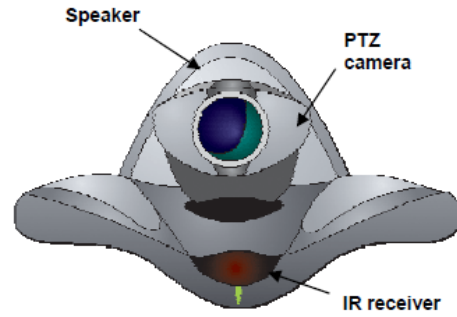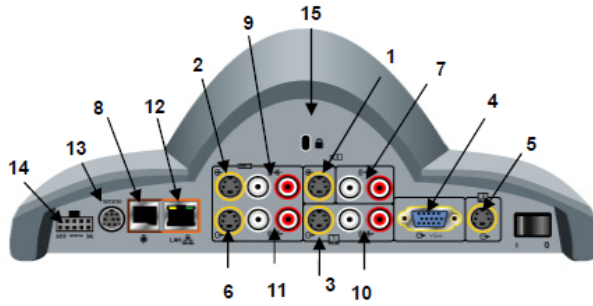

- | | | |
|--|---|---|
| 1. Video input 1 for 2 nd video source (people or content) | 7. Audio input 1 (main): support one device for stereo audio – see admin manual for device options and correct ordering of devices. | 13. RS-232 for 2 nd PTZ camera, control or pass thru |
| 2. Video input 2 for VCR/DVD or 3 rd video source (people or content) | 8. Audio input 2 for stereo line level input | 14. Power interface to subwoofer (H.320 module fits in subwoofer) |
| 3. Video output 1 for main monitor | 9. Audio input 3 for stereo VCR/DVD | 15. Kensington™ lock connection |
| 4. Video output 2 for VGA/XGA main or 2 nd monitor | 10. Audio output 1 for stereo line level | |
| 5. Video output 3 for 2 nd monitor | 11. Audio output 2 for stereo VCR/DVD | |
| 6. Video output 4 for VCR/DVD | 12. LAN NIC, 10/100 auto sensing | |